





# ALMI

®



**ALMI - Rørudklinter  
til perfekte 90°-samlinger  
af runde & firkantede rør  
samt til zink-udløb**

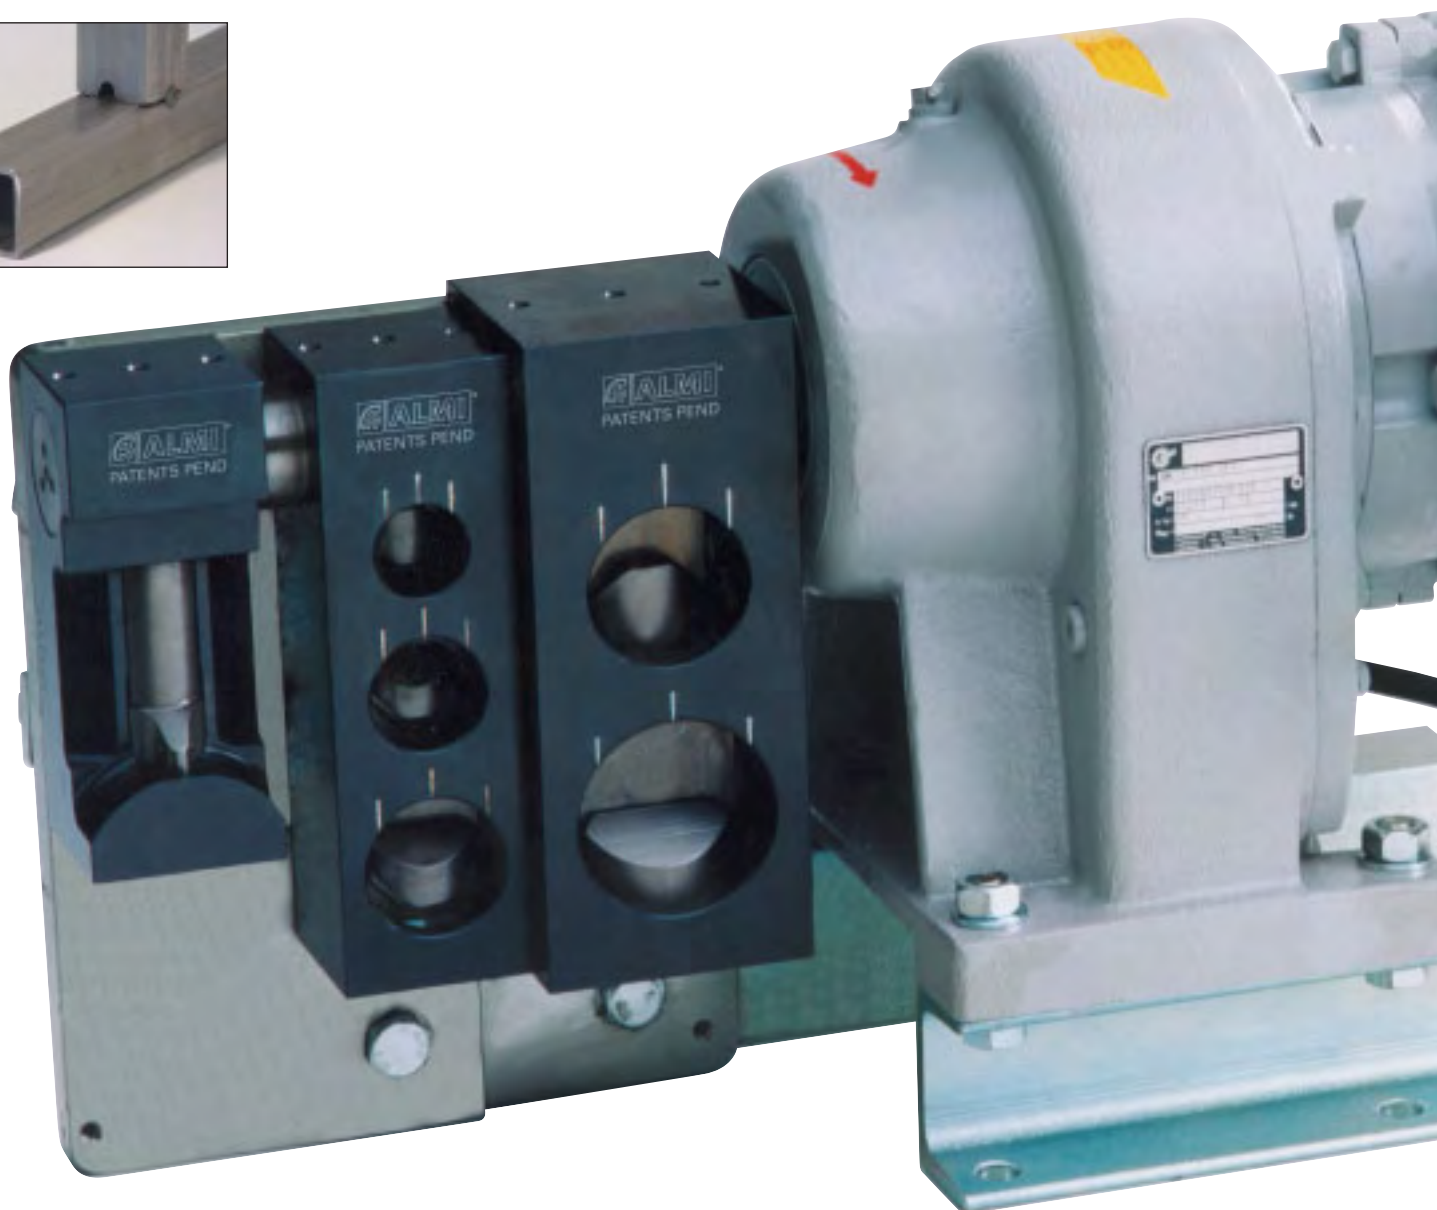




## AL1

Type AL 1

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|--------|
| ø 27.9 mm              |                                 | 4.0 mm                              |        |
| ø 34.8 mm              |                                 | 4.0 mm                              | 8.0 kg |
| ø 42.8 mm              |                                 | 4.0 mm                              |        |

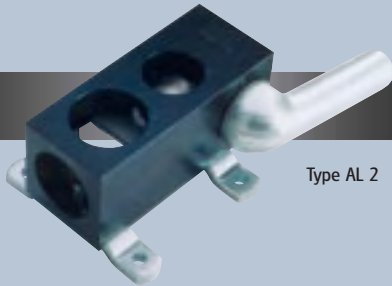

## AL2

Type AL 2

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|--------|
| ø 49.0 mm              |                                 | 4.0 mm                              |        |
| ø 61.0 mm              |                                 | 4.0 mm                              | 15 kg  |



## ALU

Type AL U


| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|--------|
| ø 27 tot 61.0 mm       |                                 | 4.0 mm                              | 7.0 kg |



## AL1-2E

Type AL 1-2E  
Electric motor (2,2 kW)

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|--------|
| ø 27.9 mm              |                                 | 5.0 mm                              |        |
| ø 34.8 mm              |                                 | 5.0 mm                              |        |
| ø 42.8 mm              |                                 | 5.0 mm                              | 87 kg  |
| ø 49.0 mm              |                                 | 5.0 mm                              |        |
| ø 61.0 mm              |                                 | 5.0 mm                              |        |

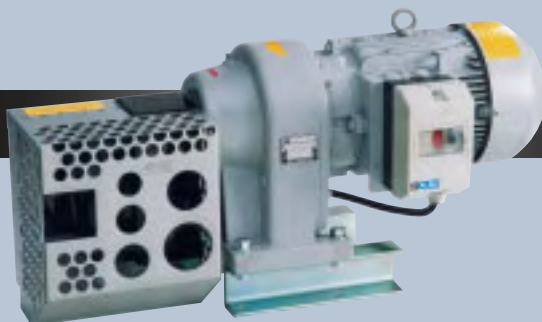

## AL1-2U

Type AL 1-2U  
Notching combination  
with sink outflow.  
Electric motor (2,2 kW)

| Outer diameter of tube | Outer diameter for sink outflow | Max. wall thickness (in mild steel) | Weight |
|------------------------|---------------------------------|-------------------------------------|--------|
| ø 27.9 mm              |                                 | 5.0 mm                              |        |
| ø 34.8 mm              |                                 | 5.0 mm                              |        |
| ø 42.8 mm              | ø 27 tot 61.0 mm                | 5.0 mm                              | 93 kg  |
| ø 49.0 mm              |                                 | 5.0 mm                              |        |
| ø 61.0 mm              |                                 | 5.0 mm                              |        |

**T. Troland Værktøjsmaskiner**  
**Tlf.: +45 74 42 41 48**  
**E-mail: nt@troland.dk**